




Q-Max EC 200 - 1203 m³/h

TECHNICAL DATASHEET

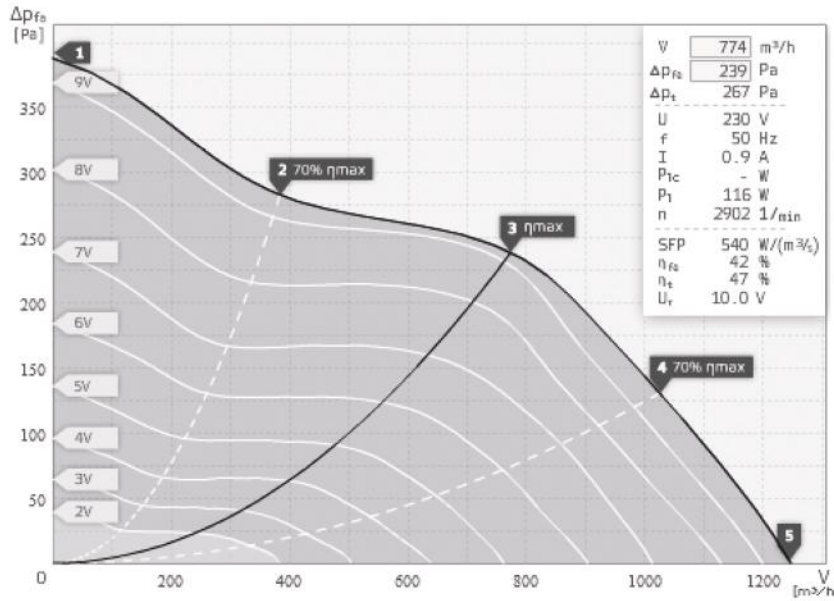

- with integrated diagonal fan ETAMASTER
- Sound insulated metal casing
- EC-motor
- Variable speed control
- Integrated electronic

Operating Point		1	2	3	4	5
Current I	A	0,8	0,8	0,9	0,9	0,9
Power Consumption P1	W	101	98	116	119	117
RPM n	1/min	3091	3111	2902	2856	2901
SPL inlet LWA5	dB(A)	69	68	71	71	72
SPL outlet LWA6	dB(A)	68	68	71	72	73
SPL casing break out LWA2	dB(A)	54	54	55	55	56

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	70	41	59	65	66	62	59	57	50
Outlet	LWA6	71	41	54	67	67	62	51	49	42
Casing	LWA2	55	41	44	47	52	47	42	36	30

Q-Max EC 200, 1203 132176	
Voltage UN	230 V 1~
Current Imax	1
Ambient Temperature tA	40 °C
Medium Temperature tM	40 °C
Speed Control	0-10V
Motor Protection	TEC
Isolation Class	F
Weight	0 kg

